


PROPS TECHNICAL DETAILS


BS PROPS:

- BS Props fully confirm to the requirements of BS 4074 : 1982 and have been tested in accordance with BS 5507 Part 3 : 1982.
- BS Props are manufactured from high quality material with a Powder coated painted finish for long life and are highly resistant to site wear and tear.
- BS Props can be used on all types of building construction or for any type of use where an adjustable load bearing member is required.
- The high tensile steel pin is located through a slot in the outer section and a hole on the inner section for coarse adjustment. The cast collar located below the pin gives fine adjustment for leveling or striking.
- The rolled thread ensures no loss of material or strength at this critical point.

| DESCRIPTION | MINIMUM HEIGHT | MAXIMUM HEIGHT | WEIGHT (kg) |
|---------------|----------------|----------------|-------------|
| BS Prop No. 0 | 1.07 m | 1.82 m | 11.00 |
| BS Prop No. 1 | 1.75 m | 3.12 m | 16.70 |
| BS Prop No. 2 | 1.98 m | 3.35 m | 18.40 |
| BS Prop No. 3 | 2.59 m | 3.95 m | 20.20 |
| BS Prop No. 4 | 3.20 m | 4.87 m | 24.20 |

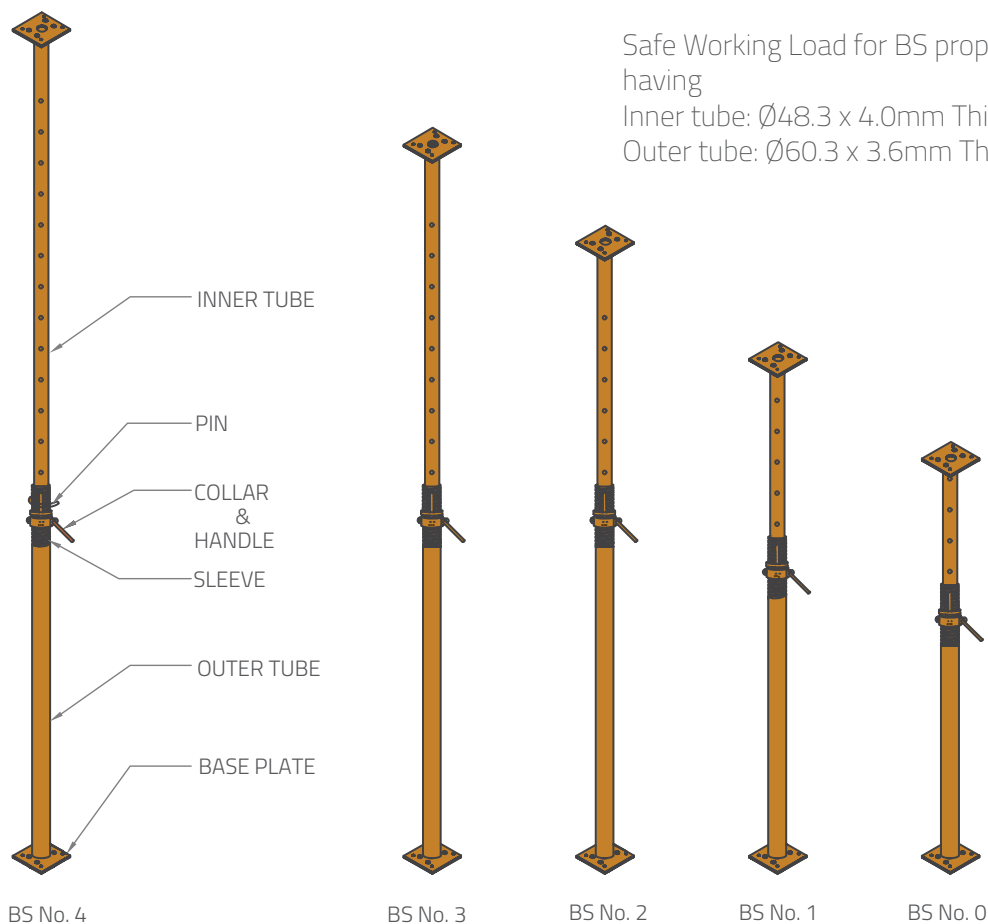

TECHNICAL DATA:-
KOREAN PROP (3.9M)

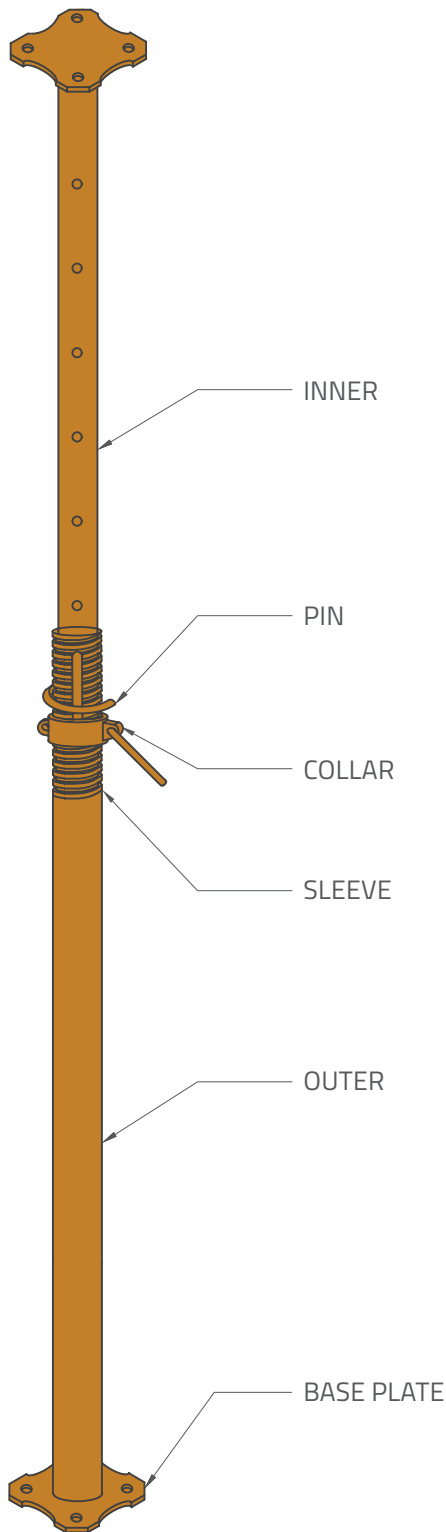

| SIZE | MINIMUM HEIGHT | MAXIMUM HEIGHT | WEIGHT (kg) |
|-------|----------------|----------------|-------------|
| 3.9 m | 2.40 m | 3.90 m | 12.50 |

PROPS ARE AVAILABLE IN 2, 3.2 & 4mm Thk. TUBES
OTHER SIZES ARE AVAILABLE ON REQUEST

* WEIGHT ARE GIVEN FOR PROPS HAVING 2mm THICK TUBE.
PROPS ARE AVAILABLE IN 2, 3.2 & 4mm Thk. TUBES
OTHER SIZES ARE AVAILABLE ON REQUEST

SAFE WORKING LOAD FOR KOREAN PROP

Inner tube : $\varnothing 48.3 \times 2.0$ mm Thick
Outer tube : $\varnothing 60.3 \times 2.0$ mm Thick
Plate : $120 \times 120 \times 4.8$ mm Thick

MAXIMUM ALLOWABLE LOAD - 15KN (1.5 TON)